

eXtend POS



Unique POS, slim and sleek

Experience the versatility of the SENOR eXtend POS, a light and compact POS giving you the best solution for countertop or wall-mount operation.



SE**N**OR

SE**N**OR TECH CO., LTD.
Version: 2019-1.0

eXceed your eXpectations



Foldable for easy storage and portability, the eXtend POS is ideal for EXPO, Trade Shows, or Concept Pop-Up stores.

The arms of the docking station allows for vertical adjustment of the screen display to an ergonomic height for user comfort or leveled to the installed printer height.



Versatile Usage Wall Mount w/o Accessories

The unit can be installed without any additional mounting bracket on the wall.



Type A.

Wall Mount
With Printer
/ Accessories



Type B.

Wall Mount
Without VESA

Easy peripherals installation

Peripheral options can be installed onto the unit via USB ports without any screws, providing for easy maintenance and high reliability.



X1-15.6" S1-11.6"**android** 

Specifications

Model No.	X1	S1
Processor	Rockchip RK3399 Cortex™-A72 Dual-core and Cortex™-A53 Quad-core(up to 1.8 GHz)	
Memory / Storage	4GB/ 64GB	
	4G/ 128G	
Display	15.6" 16:9 LED backlight TFT LCD, 1920*1080	11.6" 16:9 LED backlight TFT LCD, 1920*1080
Wireless LAN	802.11 a/b/g/n/ac, 2x2 MIMO, Bluetooth 4.1	
Operation System	Android 9.0	
External I/O	I	II
USB 2.0	3	3
USB 3.0	1	1
LAN port RJ45	1	1
COM port RJ48	2	2
Cash Drawer port RJ11	1	NA
Printer Power USB	NA	1

*NOTE:

- 1.The specification in column green is project-based.
- 2.The product information and specifications are subject to change without notice.

11.6”



Specifications

Model No.	S3e	S3s	S3p	S3a
Processor	Intel Celeron 3865U (2M Cache, 1.8 GHz)	Intel Core i3-7020U (3M Cache, 2.30 GHz)	Intel Core i5-7200U (3M Cache, 3.1 GHz)	Intel Core i7-7500U (4M Cache, 3.5 GHz)
System Memory	1 x SODIMM DDR4 socket supports Supports DDR4 2133 Max. 16GB			
Storage	1* M.2 2280 SSD (PCIe 3.0x4) 1* M.2 2280 SSD (SATA III) Expansion			
Display	11.6" 16:9 LED backlight TFT LCD, 1920*1080			
Wireless LAN	802.11 a/b/g/n/ac, 2x2 MIMO, Bluetooth 4.1			
Operation System	Win 10 IoT 64-bit, Linux kernel 3.0 up			
External I/O	I		II	
USB 2.0	3		3	
USB 3.0	1		1	
LAN port RJ45	1		1	
COM port RJ48	2		2	
Cash Drawer port RJ11	1		NA	
Printer Power USB	NA		1	

※NOTE:

- 1.The specification in column green is project-based.
- 2.The product information and specifications are subject to change without notice.

15.6”

Windows 10



Specifications

Model No.	X3e	X3s	X3p	X3a
Processor	Intel Celeron 3865U (2M Cache, 1.8 GHz)	Intel Core i3-7020U (3M Cache, 2.30 GHz)	Intel Core i5-7200U (3M Cache, 3.1 GHz)	Intel Core i7-7500U (4M Cache, 3.5 GHz)
System Memory	1 x SODIMM DDR4 socket supports Supports DDR4 2133 Max. 16GB			
Storage	1* M.2 2280 SSD (PCIe 3.0x4) 1* M.2 2280 SSD (SATA III) Expansion			
Display	15.6" 16:9 LED backlight TFT LCD, 1920*1080			
Wireless LAN	802.11 a/b/g/n/ac, 2x2 MIMO, Bluetooth 4.1			
Operation System	Win 10 IoT 64-bit, Linux kernel 3.0 up			
External I/O	I		II	
USB 2.0	3		3	
USB 3.0	1		1	
LAN port RJ45	1		1	
COM port RJ48	2		2	
Cash Drawer port RJ11	1		NA	
Printer Power USB	NA		1	

※NOTE:

- 1.The specification in column green is project-based.
- 2.The product information and specifications are subject to change without notice.

15.6”

Windows 10



Specifications

Model No.	X4e	X4s	X4p	X4a
Processor	Intel Celeron 3865U (2M Cache, 1.8 GHz)	Intel Core i3-7020U (3M Cache, 2.30 GHz)	Intel Core i5-7200U (3M Cache, 3.1 GHz)	Intel Core i7-7500U (4M Cache, 3.5 GHz)
System Memory	1 x SODIMM DDR4 socket supports Supports DDR4 2133 Max. 16GB			
Storage	1* M.2 2280 SSD (PCIe 3.0x4) 1* M.2 2280 SSD (SATA III) Expansion			
Display	15" 4:3 LED backlight TFT LCD, 1024*768			
Wireless LAN	802.11 a/b/g/n/ac, 2x2 MIMO, Bluetooth 4.1			
Operation System	Win 10 IoT 64-bit, Linux kernel 3.0 up			
External I/O	I		II	
USB 2.0	3		3	
USB 3.0	1		1	
LAN port RJ45	1		1	
COM port RJ48	2		2	
Cash Drawer port RJ11	1		NA	
Printer Power USB	NA		1	

※NOTE:

- 1.The specification in column green is project-based.
- 2.The product information and specifications are subject to change without notice.

15.6”

Windows 10



Specifications


Model No.	X5e	X5s	X5p	X5a
Processor	Intel Celeron 3865U (2M Cache, 1.8 GHz)	Intel Core i3-7020U (3M Cache, 2.30 GHz)	Intel Core i5-7200U (3M Cache, 3.1 GHz)	Intel Core i7-7500U (4M Cache, 3.5 GHz)
System Memory	1 x SODIMM DDR4 socket supports Supports DDR4 2133 Max. 16GB			
Storage	1* M.2 2280 SSD (PCIe 3.0x4) 1* M.2 2280 SSD (SATA III) Expansion			
Display	15.6” 16:9 LED backlight TFT LCD, 1920 x 1080			
Touch Screen	On Cell PCT (Projected Capacitive Touch)			
Wireless LAN	802.11 a/b/g/n/ac, 2x2 MIMO, Bluetooth 4.1			
Operation System	Win 10 IoT 64 bit, Linux kernel 3.0 up			
External I/O	I		II	
USB 2.0	3		3	
USB 3.0	1		1	
LAN port RJ45	1		1	
COM port RJ48	2		2	
Cash Drawer port RJ11	1		NA	
Printer Power USB	NA		1	

※NOTE:

1.The specification in column green is project-based.

2.The product information and specifications are subject to change without notice.

eXpandable Peripherals

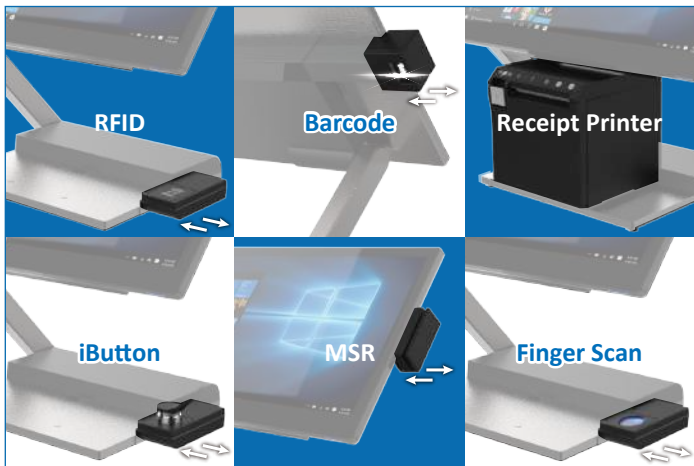

eXtendable Screens

Customer Display-
15.6" or 11.6"



VFD-
Type.A or
Type.B



eXterior Colors

Dark Space or
Bright White



No. 165, Kangning Street, Xizhi District, New Taipei City 22150, Taiwan

Tel: +886-2-2695-2780

Fax: +886-2-2695-2745

E-mail: sales@senortech.com

<http://www.senortech.com>